




REFRACTORY SOLUTIONS

REFORMERS, CRACKERS & HEATERS

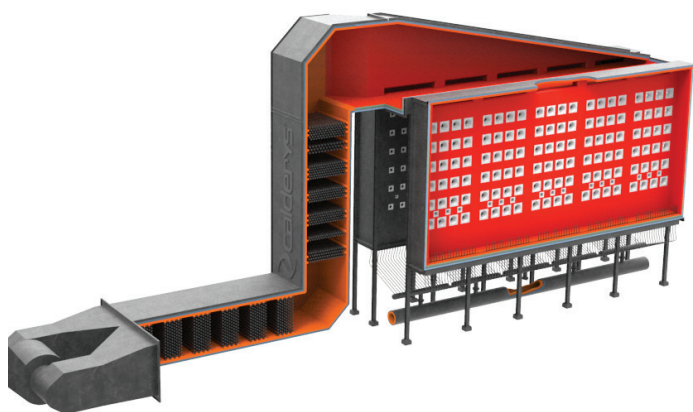

Radiant arch

CF-MODULE 1400 with CF-BLANKET 1400
 CALDE® GUN XL 140
 CALDE® CAST XL 106 C/G
 CALDE® CAST XL 100 C/G

Radiant walls

IFB ASTM 28 or IFB ASTM 26 with CASI BOARD 1100
 CERAMIC FIBER MODULES 1400°C with CERAMIC FIBER BLANKET
 or CALDE® XL 140 C/G with CALDE® CAST XL 106 C/G

Flue Gas Duct

CALDE® CAST LW 116 C/G
 CALDE® CAST LW MIX 124 C/G
 CALDE® CAST MW 116


Cold Collector

Hot face options

CALDE® CAST T 95
 CALDE® CAST 40 TR

Cold face options

CALDE® CAST LW 154 CO
 CALDE® FLOW MW 170 CO
 CALDE® CAST LW 134 CO C/G
 CALDE® CAST XL 128 CO

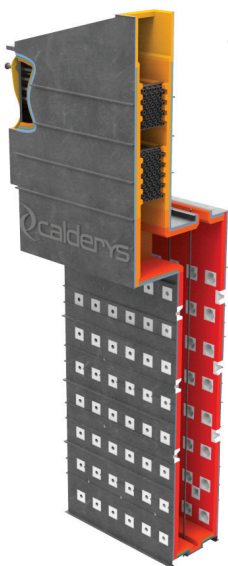

Convection Section

Hot face layer options

CALDE® CAST LW 134 C/G
 CALDE® CAST MW 116

Stack

CALDE® CAST LW 116 C/G
 CALDE® CAST LW MIX 124 C/G
 CALDE® CAST MW 116

Radiant floor

FIREBRICKS FCB 40%
 or CALDE® CAST F 35
 with CALDE® CAST LW 130 C/G



BURNER BLOCKS (WHITE BLOCKS IN THE WALLS)

Precast refractory shapes with high strength and good thermal shock resistance

